

Industrial vacuum cleaner 581A

Powerful dry vacuum with pre-separator for material recovery.



Powerful and flexible industrial vacuum cleaner unit installed on trolley, equipped with a grit/dust discharge unit on pre-separator silo. The cleaned grit can be emptied into a bucket, feed system or floor bin. The dust is trapped in the NCF filter and collected in the second stage silo. Suitable for use in blasting halls for grit recovery and cleaning of blasted hulls and steel structures.


- Very high airflow and high collection capacity
- Forklift handling with high mobility
- Efficient filter and grit/dust separation

Product name	Industrial vacuum cleaner 581A
Installation	Indoor, Outdoor
Filter cleaning method	Pulse jet
Application	Dust, Granulate, Grit
Hose length (m)	10
Filter Area (m ²)	3,15
Number of filter elements	70
Filter material	NCF
Type of hose	PU12
Compressed air requirement	5,4 Nm ³ /min
Max airflow (m ³ /h)	660
Noise level (dB(A))	78.0
Max vacuum (kPa)	-48
Weight (kg)	290
Hose length (m)	10
Hose diameter (mm)	76
Note	With gulper head and scraping tool, 3,15 m ² filterarea



Granulate Grit Dust




Industrial vacuum cleaner 581A

Image	Description	Model
	581A - NE76, S200	42158100*


*With gulper head and scraping tool, 3,15 m² filterarea

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PU12	Sturdy hose. Suitable for abrasive material Transparent polyurethane (t=1,2 mm) Reinforced with inbedded steel helix	- 40 deg. C. - + 90 Deg. C.				

Industrial vacuum cleaner 581A

Accessory		Part No
	Control S for NE86-96	43222008
	Control S for NE 22-76	43220026
	Control S for NE 22-76	43220001

Industrial vacuum cleaner 581A

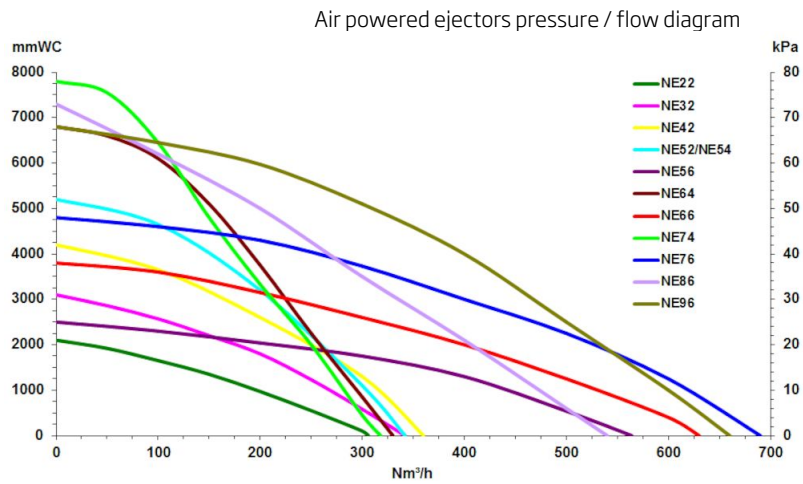

Air Powered ejectors

All performance data are based on 7 bar supply pressure