

### Dust collector with pre separator



Nederman's 471A Industrial Vacuum has a dual container system for fixed installation with built in frame. Grit and granulate discharge for separation of blasting grit from dust. Installed on silo for grit storage. Dust is discharged in the NCF (candle filter) filter and collected in a container. The filter is automatically cleaned at system shut off, or can be done automatically by installation of a timer control system. Heavy-duty vacuum unit for material collection over long distances. Suitable for collection of mixed dust and granulated products.

- Cleaning system for reusable grit
- Seperates dust from reusable grit
- High vacuum and suction capacity

Product name	Industrial vacuum cleaner 471A
Installation	Outdoor, Indoor
Filter cleaning method	Reverse air pulse
Application	Dust, Grit, Granulate, Swarf
Dustbin volume (I)	89 I cyclonic silo + 67 I dust bin
Filter Area (m²)	1,6
Filter type	Candle filter
Number of filter elements	70
Filter material	Vyon
Type of hose	Without
Compressed air requirement	3,0 Nm3/min
Max airflow (m³/h)	342
Noise level (dB(A))	75,5
Max vaccum (kPa)	-52
Weight (kg)	165











This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB www.nederman.com

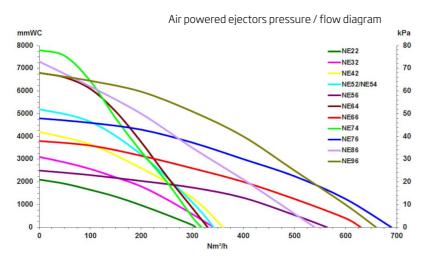


Image	Description	Model
	471A - NE52, S50. No accessories	42147104



	Accessory	Part No
	Control S for NE86-96	43222008
	Control S for NE 22-76	43220026
00	Control S for NE 22-76	43220001





Air Powered ejectors

All performance data are based on 7 bar supply pressure